

# Accona

## Timer Panel Heater

0.5, 1.0, 1.5, 2.0 and 2.4 kW



p.114

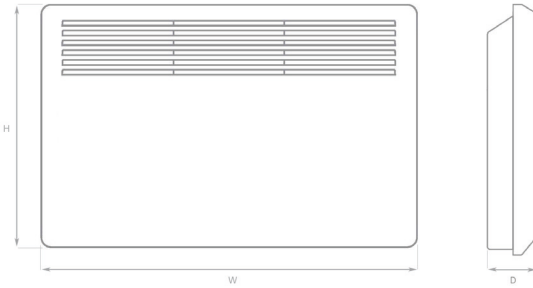
### Usage

Ideal for a wide range of fixed installation heating applications in the home and office environment. Now available in anthracite.

### Features and Benefits

- Stylish curved slimline design
- Ecodesign compliant
- Available in 0.5, 1.0, 1.5, 2.0 and 2.4 kW models
- 24/7 LED electronic timer
- Manual or timer operation setting
- Timer configurable in 1 hour slots
- Temperature range 5 - 30°C
- Open window detection to reduce energy wastage
- Power on display
- Element on indicator
- Full or half power setting
- Frost protection setting at 5°C
- Easy to use control panel
- IP24 splash-proof
- Integrated child lock
- Wall mounted - secure bracket included
- Slimline - depth only 90mm
- White or anthracite finish
- Product codes ending A are anthracite finish

Product Code	Power (kW)	Timer	Current (amps)
AC500T/ AC500TA	0.5	Yes	2.2
AC1000T/ AC1000TA	1.0	Yes	4.3
AC1500T/ AC1500TA	1.5	Yes	6.5
AC2000T/ AC2000TA	2.0	Yes	9.0
AC2400T/ AC2400TA	2.4	Yes	10.4

**Outer Casing**

Powder coated steel

**Element**

Aluminium x-shape heating element

**Controls**

Digital controls and screen

**Louvres**

0.5 and 1.0 kW have two columns of louvres

1.5 kW has three columns of louvres

2.0 kW and 2.4 kW has four columns of louvres

**Safety**

Overheat temperature protection.

**IP Rating**

IP24

**Installation**

Wall mounting kit included and must be used.

**Electrical Connection**

Installation must comply with current IET wiring regulations.

The product should be connected to the fixed wiring of the property via a suitably rated isolating switch with a contact separation of at least 3mm in all poles.

Cable pre-wired (1.8m), white cable, entry to the top right of the unit.

Class I

**Approvals**

CE, UKCA

**Standard Warranty**

2 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth* (mm)	Weight (kg)
AC500T/ AC500TA	400	460	90	3.4
AC1000T/ AC1000TA	400	460	90	3.4
AC1500T/ AC1500TA	400	595	90	4.7
AC2000T/ AC2000TA	400	830	90	5.7
AC2400T/ AC2400TA	400	950	90	7.4

\*Depth excludes bracket. For depth including bracket add 30 mm.