

# Mistral

Plinth Heater supplied with Programmable Thermostat  
2.4 kW



## Usage

A good solution to provide heat in a kitchen or similar environments where wall space is restricted. Supplied with a programmable thermostat and 3 fascia finishes: black, white and stainless steel.

## Features and Benefits


### Plinth Heater

- Plinth heater fits neatly into plinth board beneath kitchen units
- Space saving - no need for a separate radiator
- Durable steel construction
- Plinth heater comes with 3 stylish fascia finishes: black, white or stainless steel
- 2.4 kW power rating
- 3 power settings, 0.8 kW, 1.6 kW and 2.4 kW
- Cable prewired (2 m) for versatile installation options
- Smooth and quiet operation
- Simple to use
- Overheat protection
- Fits in a standard 140 or 150 mm plinth, min plinth height 130 mm
- Fan only setting for air circulation in summer months

### Programmable Thermostat

- Programmable thermostat fitted on wall above worktop allows convenient touch screen control
- Slimline profile fits in standard pattress
- Manual or program operation setting
- Operating temperature range 5 - 35°C
- Program configurable in 6 time periods per day
- Open window detection to reduce energy wastage
- Memory recall after power off

Product Code	Power (kW)	Current (amps)
ML2400	2.4	10

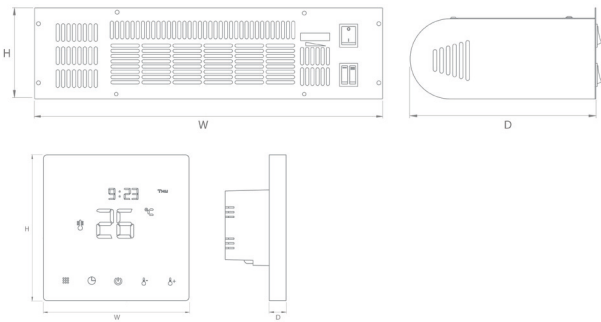

**Plinth Heater**  
**Outer Casing**  
Durable pressed steel

**Controls**  
On/ off switch

3 power settings 0.8 kW, 1.6 kW and 2.4 kW.

Thermostat dial.

**Safety**  
Overheat temperature protection.

**IP Rating**  
IP20

**Electrical Connection**  
Supplied with a pre-wired white cable (2 m), cable entry to the left of the heater.

Class II

**Approvals**  
CE, UKCA

**Standard Warranty**  
1 year parts or replacement warranty.

**Programmable Thermostat**  
**Outer Casing**  
ABS

**Controls**  
Digital LCD display, touch screen controls.

Temperature display (°C)

**Temperature Range**  
5 - 35 °C

**IP Rating**  
IP20

**Installation**  
Wall mounting screws included.

**Electrical Connection**  
Installation must comply with current IET wiring regulations.

Compatible with standard pattress.

The product should be connected to the fixed wiring of the property via a suitably rated isolating switch with a contact separation of at least 3mm in all poles.

Class I

**Approvals**  
CE, UKCA

**Standard Warranty**  
1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
ML2400	125	480	215	4.7
PT01	86	86	10*	0.25

\*Compatible with standard pattress. Back box fitting 26 mm depth, 50 mm height.