

Sapphire Stainless Steel Water Chiller

Floor Standing

Illustrated with optional BREEAM kit fitted




Usage

Ideal for high usage public areas, such as schools, gyms and office areas.

Features and Benefits

- Instant high quality chilled drinking water
- Plumbed in system gives reduced costs over bottle fed chillers
- Elegant stylish design
- Stainless steel sink top and cabinet
- Push button bubbler and sports bottle/ carafe filler included
- Direct chill technology
- High quality drinking water filter supplied (F1T). (See page 34).
- Filter cartridges are simple and quick to change
- Chilled water temperature adjustable
- Optional BREEAM compliance kit
- Chilled water temperature adjustable from 8°C to 12°C

Product Code	Power (kW)	Chill Capacity (litres/hour)	Current (amps)
SAP25SS	0.18	30	0.8

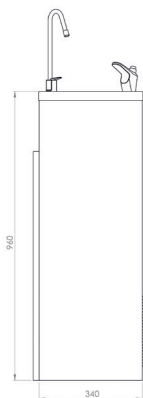

Outer Casing
Stainless steel

Cooling Coil
Stainless steel

Capacity
30 l /h (based on a 167 ml glass)
180 glasses per hour

BREEAM Compliance
BREEAM compliant when fitted with optional BREEAM kit.

Kit comprises stainless steel side panels and top panel as illustrated.

Ensures chiller securely fixed to the wall and protects against vandalism.

Chiller has adjustable foot and can be bolted to the floor.

Refrigerant Type
R134A

IP Rating
IP23

Installation
Chiller must be positioned 60 – 70mm from the wall to allow adequate ventilation.

Chilling requires the ambient temperature to be between 10°C and 45°C.



Plumbing
Must be installed by a suitably qualified person.

Supplied with all fittings required including adaptors to facilitate connection to 15mm copper pipe.

Minimum water pressure 1 bar.

Maximum water pressure 3 bar, if higher than this a pressure reducing valve is required.

Electrical Connection
Installation must comply with current IEE regulations.

The product should be connected to the fixed wiring of the property via a double pole fused spur with a minimum break capacity of 13 amps.
Cable pre-wired (1.5m), entry to the back of the unit.

Maintenance
Sanitise every 3 to 6 months.

Replace filter approximately every 6 months.

See product instructions for full maintenance requirements.

Approvals
CE

Standard Warranty
1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
SAP25SS	960	340	325	26
BREEAM Kit	930	320	100	2