

Avignon

Wi-Fi Electric Ceramic Radiator

0.5, 1.0, 1.5 and 2.0 kW



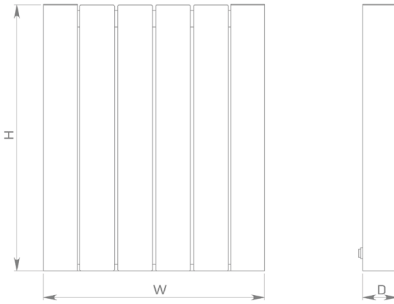
Usage

A stylish and elegant designer electric ceramic radiator in a modern panel style, with timer module and Wi-Fi control. Available in white and anthracite finish. Heating can be conveniently managed on the go via the Smart Life app and energy efficient features reduce electricity consumption.

Features and Benefits

- Modern horizontal panel design
- Ecodesign compliant
- Available in 0.5, 1.0, 1.5 and 2.0 kW models
- Stylish timer module with Wi-Fi control
- 24/7 daily and weekly programming
- Convenient smart operation on the go using Smart Life app
- Open window detection to reduce energy wastage
- Power on display
- Ceramic element
- Frost protection setting at 7°C
- Integrated child lock
- 4-digit keypad lock - enables password/landlord mode, making it ideal for controlled settings such as student accommodation, hotels, and rental properties
- Integrated energy monitoring - track daily and cumulative energy usage through the Energy Meter section of the app
- Product codes with A - anthracite, W - white finish

Product Code	Power (kW)	Wi-Fi	Current (amps)
AV500W/ AV500A	0.5	Yes	2.2
AV1000W/ AV1000A	1.0	Yes	4.3
AV1500W/ AV1500A	1.5	Yes	6.5
AV2000W/ AV2000A	2.0	Yes	9.0

**Outer Casing**

Die cast aluminium

Fins

Die cast aluminium

Element

Ceramic element

Controls

Timer module and Wi-Fi control

Safety

Overheat temperature protection.

IP Rating

IP24

Installation

Wall mounting kit included and must be used.

Electrical Connection

Installation must comply with current IET wiring regulations.

The product should be connected to the fixed wiring of the property via a suitably rated isolating switch with a contact separation of at least 3mm in all poles.

Cable pre-wired (1.4m)TBC, grey cable, entry to the bottom right of the unit.

Class I

Approvals

CE, UKCA

Standard Warranty

3 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth* (mm)	Weight (kg)
AV500W/ AV500A	568	431	80	9.7
AV1000W/ AV1000A	568	531	80	11.7
AV1500W/ AV1500A	568	631	80	13.9
AV2000W/ AV2000A	568	880	80	18.3

*Depth excludes bracket. For depth including bracket add 20 mm.