




Product Instruction Manual

# Alize

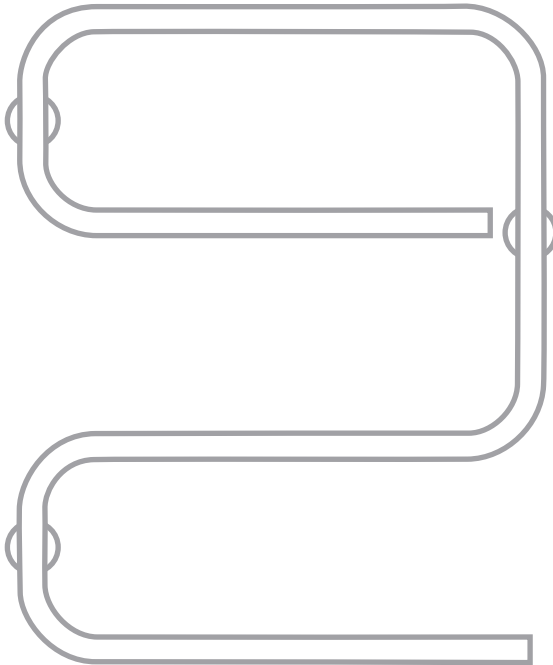

**AL80SW, AL80SWL**

S Shaped towel rail

Thank you for purchasing the Hyco Alize towel rail. The Alize has a traditional s- shaped design and is suitable for use in bathrooms to provide dry, warm towels. Please read and understand these instructions before commencing installation, and leave them with the user when installation is complete.

## 1. Important safety points



The electrical installation must be carried out by a qualified electrician in accordance with the current edition of the I.E.E. Wiring Regulations.



This appliance must be earthed.



Means for electrical disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.



Only connect the unit to a single phase supply with a mains voltage as specified on the rating plate.



Do not carry the appliance by the supply cord.



The supply cord cannot be replaced by the user. If the cord is damaged the appliance should be returned to the manufacturer or an authorised service agent for replacement.



The appliance must not be located immediately below an electrical socket outlet.



This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.



In order to avoid a hazard for very young children, this appliance should be installed so that the lowest heated rail is at least 600mm above the floor.



This appliance is intended only for drying textiles washed in water.

## 2. Installation

### Wall Mounting



Ensure that the surface selected for mounting the appliance is suitable for the weight of the product.



In order to avoid a hazard for very young children, this appliance should be installed so that the lowest heated rail is at least 600mm above the floor.



Ensure the cable exits the heater at the bottom when mounting.

- Select a suitable location for the towel rail.
- Assemble the three separate brackets in place on the towel rail via the lugs located on the rear surface of the heater, do not fix the bracket ring into place at this stage.
- Hold the towel rail against its final mounting location and mark the two hole positions for each bracket onto the mounting surface.
- Drill the six holes previously marked and insert the supplied wall plugs.
- Offer the towel rail back to the wall and affix firmly into the wall plugs using the supplied screws.
- Line up the bracket ring and push firmly into place on each bracket to complete the mounting.

### Electrical Connection



This appliance must be earthed.



Means for electrical disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.

- The power cord should be connected following the colour coding below:
  - > Brown: L
  - > Blue: N
  - > Green / Yellow: E

### 3. Operation



This appliance is intended only for drying textiles washed in water.

### 4. Maintenance



Always isolate the appliance from the power supply before commencing any maintenance.




Never use abrasive chemicals or materials to clean the appliance.

- Clean the exterior of the appliance using a soft, damp cloth.

## 5. Specifications

Model	AL80SW, AL80SWL
Voltage	230v~50Hz
Power	80W
IP Rating	IPX4
Weight	1.6kg

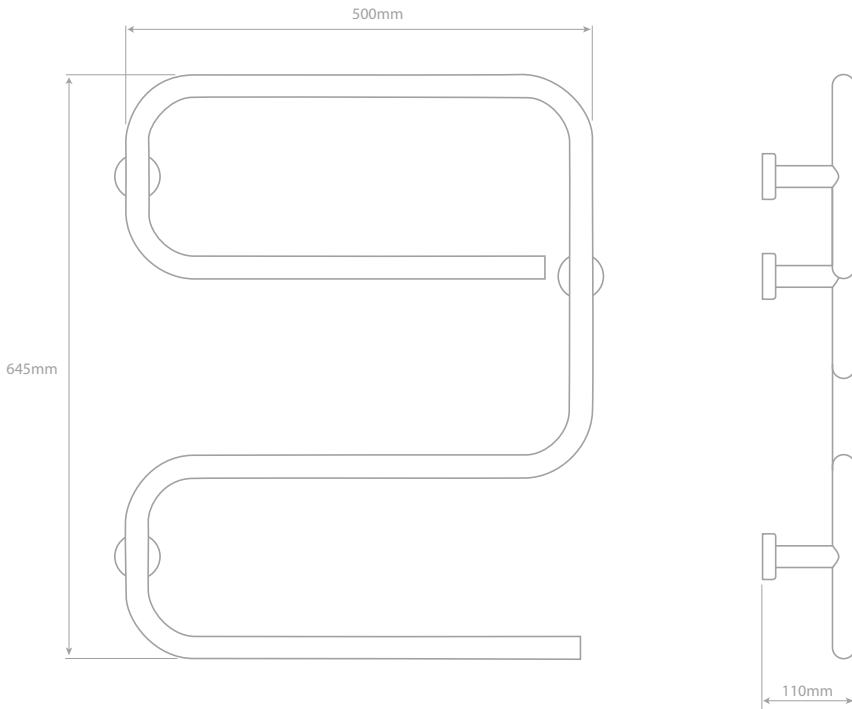

\* Model AL80SWL is opposite orientation, cable entry to the left. Special order only.



INFORMATION FOR CORRECT DISPOSAL OF THE PRODUCT IN ACCORDANCE WITH THE EUROPEAN DIRECTIVE 2012/19/EU.

At the end of its working life this equipment must not be disposed of as household waste. It must be taken to a local authority waste collection centre or to a dealer providing this service. Disposing of electrical and electronic equipment separately enables its components to be recovered and recycled to obtain significant savings in energy and resources. In order to underline the duty to dispose of this equipment separately, the product is marked with a crossed out dustbin.

## 6. Guarantee and service policy

This product is guaranteed against faulty materials and manufacture for a period of one year from the date of purchase. Hyco will in its sole discretion replace, repair or refund any faulty unit. Incorrect installation and failure to follow correct operating instructions are excluded. Consequential costs such as labour charges or damage to surroundings are expressly excluded.

Hyco Manufacturing Ltd  
Normandy Court  
Express Way  
Castleford, WF10 5NR

T 01924 225 200  
F 01924 225 210  
E [sales@hyco.co.uk](mailto:sales@hyco.co.uk)

[hyco.co.uk](http://hyco.co.uk)