

Blade

1.85 kW Automatic Hand Dryer
Energy efficient



p.70

Usage

A modern stylish design suitable for many public washroom applications including restaurants, shops and shopping centres, office buildings, pubs, motorway services, factories and supermarkets. A built in HEPA filter and UV sterilisation technology help reduce the development of bacteria making this an ideal solution for speciality markets where regulatory and compliance guidelines influence product specification. The blade is one of our most energy efficient hand dryers.

Features and Benefits

- Modern stylish design
- Intelligent ergonomic construction
- High speed giving fast drying times
- Built in HEPA filter and UV sterilisation technology reduce the development of bacteria
- Intelligent temperature control - heating element switches off when room temperature is above 25°C
- Robust design ensures durability and reliability
- Brushless motor, long life span
- Automatic double sided blades
- 1.85 kW power rating
- Option to switch heating element off to reduce power
- Choose from high (700 W) or low (600 W) air speed
- Minimum power rating 0.6 kW
- Available in white and silver
- Integral drain tank with level window
- Vandal resistant
- Blue LED dry zone indicator

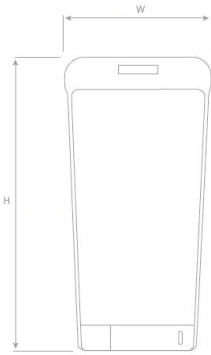


10 - 13 s

2.5 - 5.1 kWh
per 1000 dries

70 dB

Product Code	Finish	Power (kW)	Air Speed (m/s)
BLADEW	White	0.6 - 1.85	95
BLADES	Silver	0.6 - 1.85	95

**Outer Casing**

Easy clean, high impact ABS

Heating Element

1150 W - option to switch off

Motor

Min 600 W Max 700 W
DC brushless

Current

8 amps

Air Speed

95 m/s

Operation

Touch free automatic.

Safety

Overheat temperature protection.

Safety timer prevents continuous running.

IP Rating

IPX4

Installation

Full fixing pack supplied.
Fixing template provided.

Cable entry in the lower left rear corner. Optional concealed entry if desired.

Electrical Connection

Installation must comply with current IET wiring Regulations.

The product should be connected to the fixed wiring of the property via a suitably rated isolating switch with a contact separation of at least 3mm in all poles.

Class I

Approvals

CE, UKCA

Standard Warranty

3 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
BLADEW	700	300	215	9.1
BLADES	700	300	215	9.1