

# Evora

## Wi-Fi Aluminium Electric Panel Heater

0.6, 0.9, 1.5 and 2.0 kW



p.116

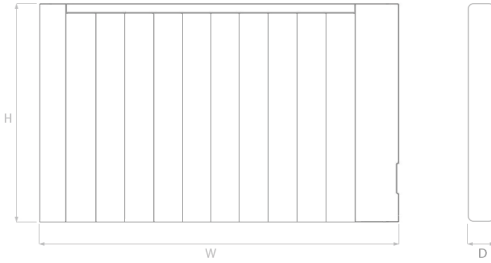
### Usage

A stylish and durable electric panel heater with Wi-Fi control. Available in white and anthracite finish. Heating can be conveniently managed on the go via the Smart Life app and energy efficient features reduce electricity consumption.

### Features and Benefits

- Classic horizontal panel design
- Instant heat, fast response convection heater
- Precision thermostat accurately targets room temperature
- Ecodesign compliant
- Available in 0.6, 0.9, 1.5 and 2.0 kW models
- Wi-Fi control
- 24/7 daily and weekly programming using the Smart Life app
- Manual operation and run back timer using control panel
- Lightweight aluminium construction suitable for low weight bearing walls
- Power on display
- Open window detection to reduce energy wastage
- Full or half power setting
- Integrated child lock
- Slimline - depth only 60mm
- White or anthracite finish
- Product codes with A - anthracite, W - white finish

Product Code	Power (kW)	Wi-Fi	Current (amps)
EV600W/ EV600A	0.6	Yes	2.6
EV900W/ EV900A	0.9	Yes	3.9
EV1500W/ EV1500A	1.5	Yes	6.5
EV2000W/ EV2000A	2.0	Yes	8.7

**Outer Casing**

Powder coated aluminium

**Element**

Aluminium x-shape heating element

**Controls**

Wi-Fi control

**Safety**

Overheat temperature protection

**IP Rating**

IPX0

**Installation**

Wall mounting kit included and must be used.

**Electrical Connection**

Installation must comply with current IET wiring regulations.

The product should be connected to the fixed wiring of the property via a suitably rated isolating switch with a contact separation of at least 3mm in all poles.

Cable pre-wired (1.5m), white (white model)/ black (anthracite model) cable, entry to the bottom right of the unit.

Class I

**Approvals**

CE, UKCA

**Standard Warranty**

2 year parts or replacement warranty.

p.117

Product Code	Height (mm)	Width (mm)	Depth* (mm)	Weight (kg)
EV600W/ EV600A	535	430	60	3.0
EV900W/ EV600A	535	590	60	4.0
EV1500W/ EV1500A	535	870	60	6.0
EV2000W/ EV2000A	535	1010	60	7.0

\*Depth excludes bracket. For depth including bracket add 15 mm.